

Smart Phone App

P6SPro Operation Quick Manual

wysLink

P6SPro Instruction

1. APP Download	2
2. Add Device & Edit.....	3
2.1 Running APP	3
2.2 Login.....	3
2.3 Device list page	4
2.4 Add device	5
2.5 Edit device	5
3. Add NVRs	7
4. Preview	8
5. Playback.....	11
6. Others.....	12



App “P6S Pro” is a smart phone app for our IP cameras, Network Video Recorders, and Digital Video Recorders.

Main function:

1. Add camera or video recorder
2. Watch live video
3. Playback the recorded video.


It support multiple channel video watching.

1. APP Download

1. Scan this QR code to download APP: Android and IOS. you can search on Google Play, or Apple App store.



*You can also find this code on your NVR

(Click main menu  to enter into System Setting----click P2P in Network Setting to reveal QR code. UID QR code will be showed simultaneously if there's UID. Use APP to scan and add device.)



2. Add Device & Edit


2.1 Running APP



Click on P6SPro icon to run APP.

2.2 Login

China Telecom 9:13 AM



LOGIN

[register new user](#) [Forgot Password](#)

Local Device

1.Cloud login: The data of added device is stored in cloud; any mobile phone can synchronize with it after login.

New account need to be registered if login in with cloud: click【Register New Account】to register via mobile number or email address, then you can login this account with password.


If you already registered: input account name and password, click 【Login】 If you forgot password: click 【Forgot Password】 to reset.

2.Local login: Data only can be saved on this mobile phone.


Click 【Local Device】 to login.




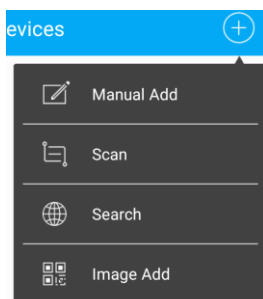
2.3 Device list page

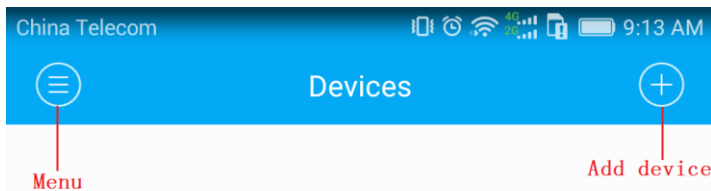

Left  menu icon: Click for more functions

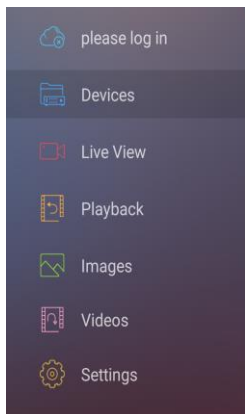

Right  add icon: click to add device.



Account Login: it appears if open it in Local mode, click and login.

Device: manage device.

Live view: watching live of camera.

Image management: the images shot from **【Live View】** or **【Playback】** can be viewed or deleted.

Video files management: the video from **【Live View】** can be watched or deleted.

System settings: System information and set up.

Add with UID: input UID to add camera.

Scanning QR code: click and open phone-camera to scan.

LAN search: search device's UID in LAN.

QR code: you can choose QR code from your album.

2.4 Add device

China Telecom 10:13 AM

Return Add Camera Save

Name: PVR Customize device's name shown on the list

UID: BZWYZN-030365-EBSYM Series number (SN)

UserName: admin User name

Security Code: ***** Password


Page after adding:

Devices Add device

PVR
BZWYZN-030365-EBSYM

Online Channel: 4

Status Channel number Edit

According to step 3, click upper-right , choose an appropriate way to add device.

Add IPC:

Name: input user name.

UID: the device UID you will found on box.

User name and password: input the user name and password of device.

Click on **【File】** button to save.

After adding device, **【Device management】** will show up on the list.

【Online】 and **【number of Channel】** are the device's status.

Click Edit button, you can check and modify device information. (If device has wrong password, it needs you to click and input right user name and password.)

Click device on this page to preview directly.

2.5 Edit device



Edit Camera

Name: PVR

UID: BZWYZN-030365-EBSYM

UserName: admin

Security Code:

Firmware version: 2.1.1-20170608

Device model: PVR-2504NEJ

Channel Management >

Channel management

Edit page:


Name/User name/Password:
input to edit again.


Firmware version/ device
model No.: showing the
device's software version and
model No.

Channel management:
Add/delete the channel of
device. (The device needs to




3. Add NVRs

1. Open APP, click  in the upper-right to add device.

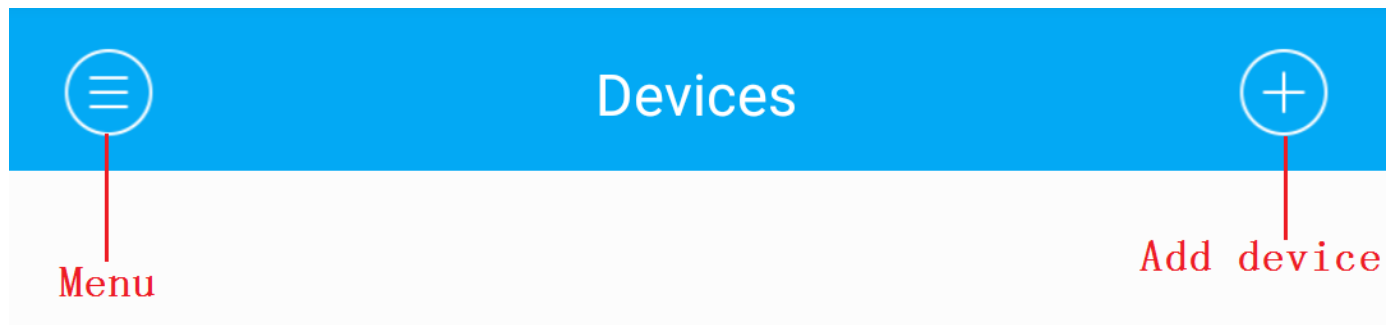


2. Device added successfully and show **【Online】**, click **【Edit】**.

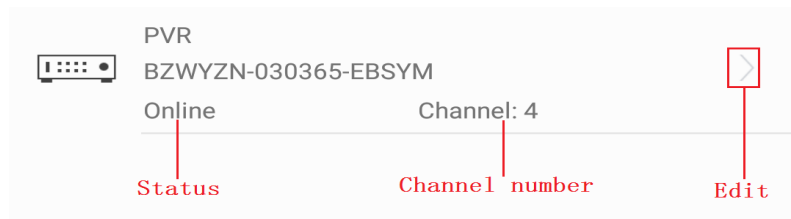

3. Click **【Channel management】** to enter into channel editing page.

Click **【+】** to add cameras

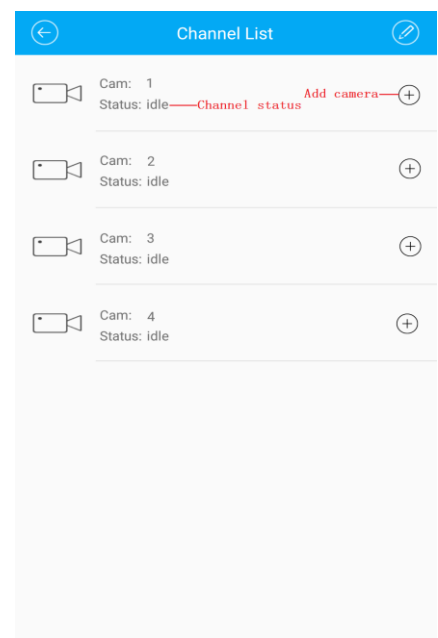


Choose one way to add:



KYTRON TECHNOLOGY CORPORATION
Videos for Monitoring and Marketing

TEL. 1-416-855-2781
www.wysLink.com

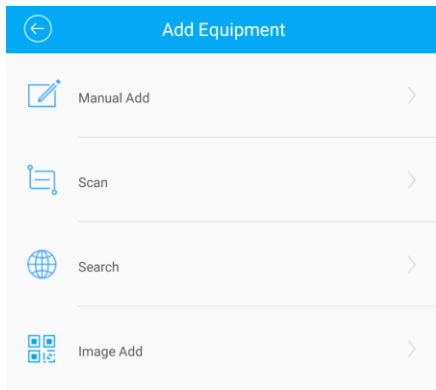

Protocol:

TUTK: TUTK P2P

ZWP2P: Zowell P2P

P6S: Zowell local IP

User name and


password: input

camera's user name and
password

Click the upper-right

【Save】

After adding:

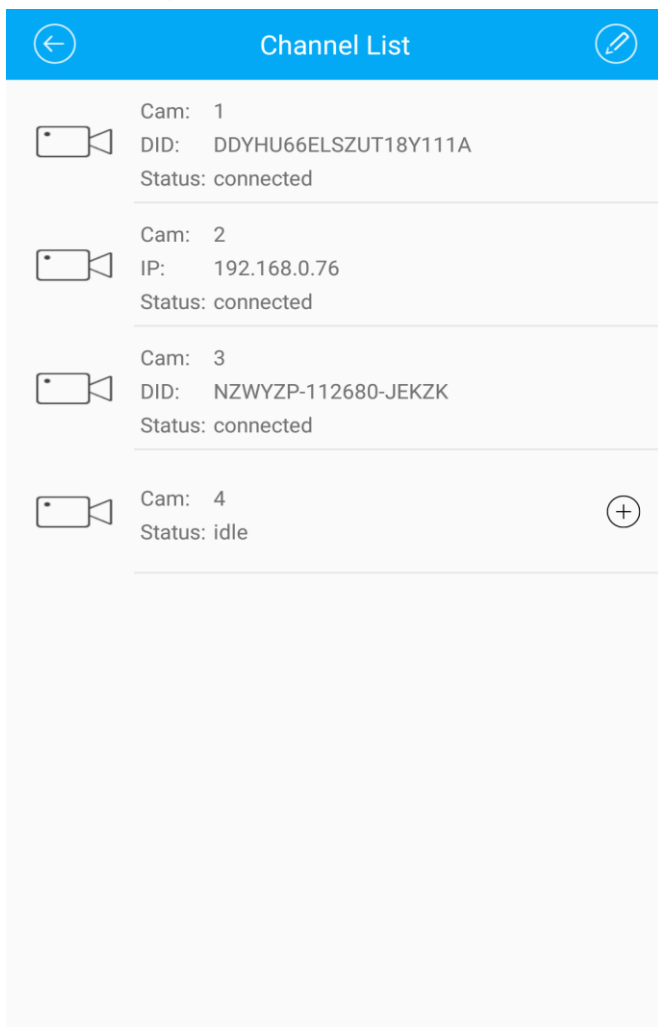

Device will show connected condition after adding, then you can add the next channel. Idle condition means no camera in the channel.

Protocol explanation:

ZWP2P: Zowell's P2P protocol, UID has 19 digits, two **【-】** in the middle, as picture channel 1.

TUTK: TUTK's P2P protocol, UID has 20 digits, as picture channel 2.

P6S: Zowell's LAN IP protocol, type is 192.168.X.X, as picture channel 3.

4. Preview


1.Preview:




KYTRON TECHNOLOGY CORPORATION
Videos for Monitoring and Marketing

TEL. 1-416-855-2781
www.wysLink.com

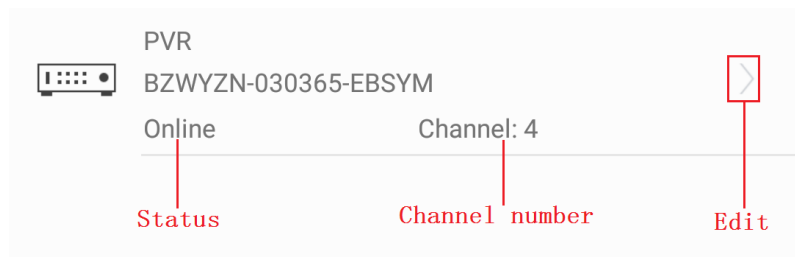

When device show **【Online】** condition, click it to preview directly.

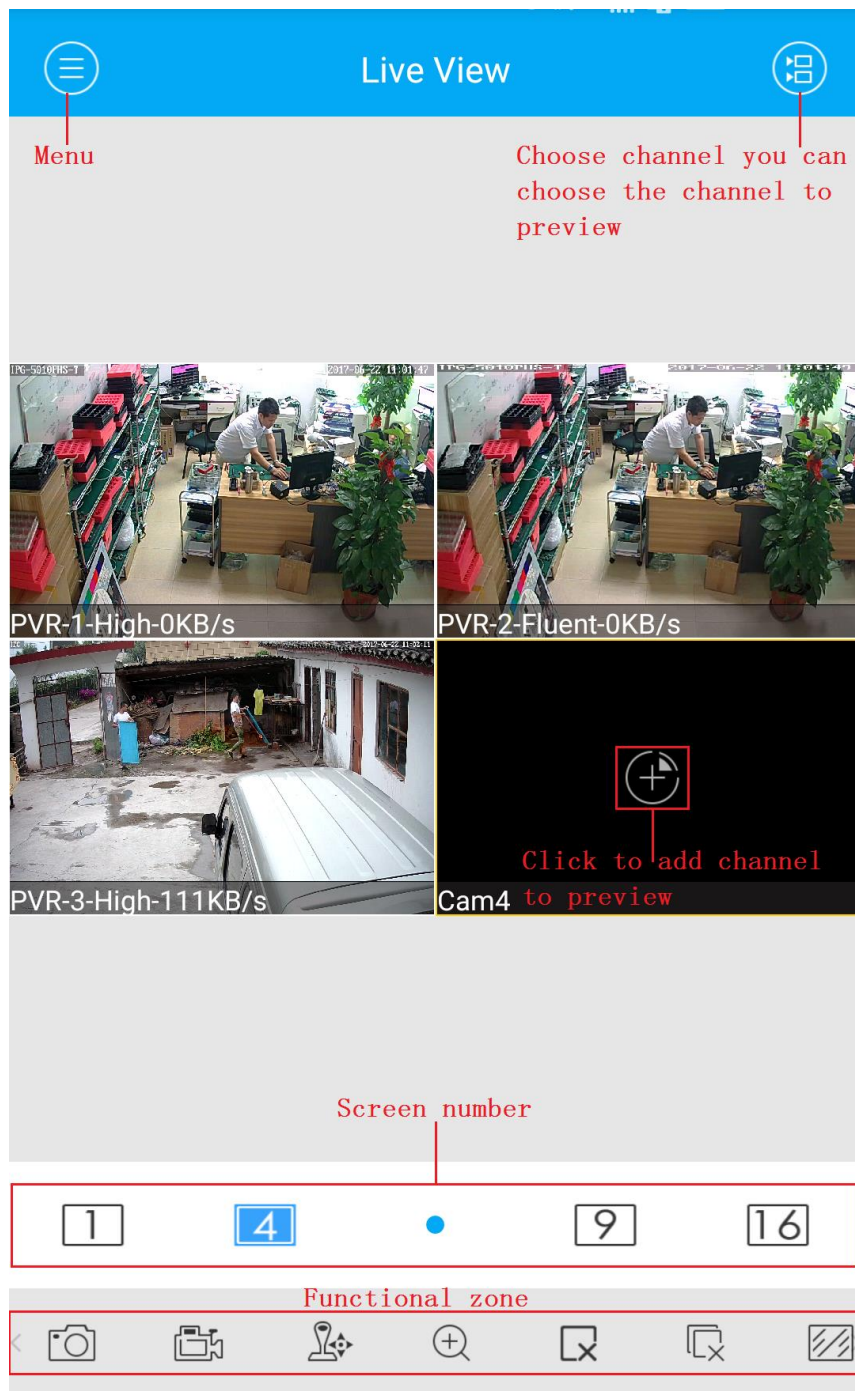

Real-time preview pages:



Three preview modes::









1. Click device list page, will skip to **【Live preview】** to play.
2. Click **【Menu】** to enter into **【Live preview】**, click the upper-right  to Choose channels to play.
3. Click **【Menu】** to enter into **【Live preview】** and click  to choose the channel to play.

Multi window view mode:

It support 1/4/9/16 split window.

Remark: when you open 8 channels and set 4 image split, so two screens will be Divided, you can slide to switch. (Window 1 shows camera1-4, window 2 Shows camera 5-8.)


Function:

	Capture		Record
	PTZ		Zoom
	Close Checked		Close All
	Resolution		Audio switch



5. Playback

Choose Remote Playback in menu.

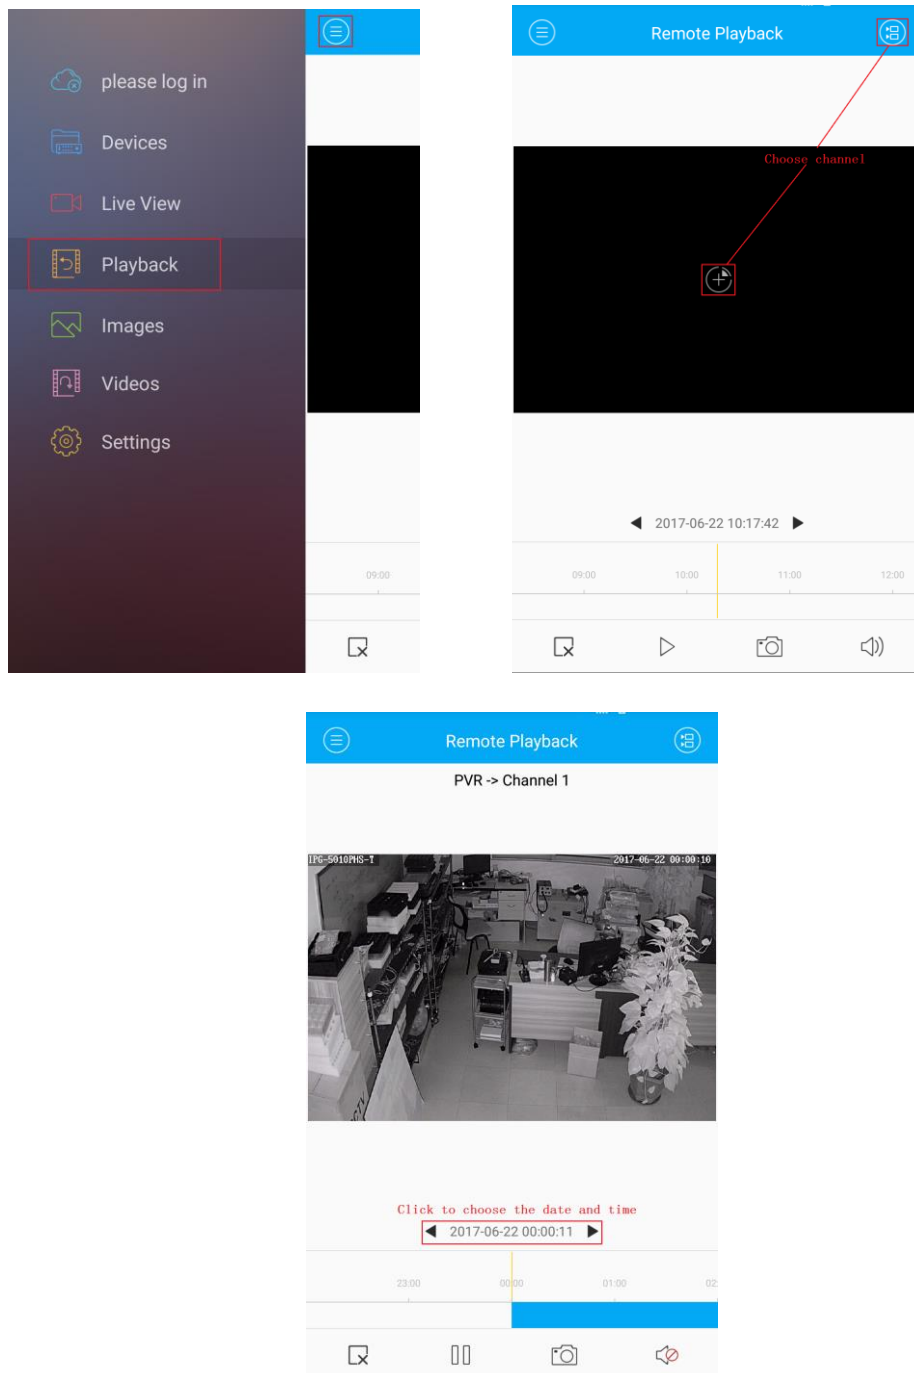

Click the upper-right channel button 【+】 to choose the channel which need to be replay. Click 【+】 ,




will popup device list, choose the channel you need. APP will retrieve recording and playback automatically.

6. Others

Image management:
All snapshots saved here.



Video management:
All recording files are saved here.

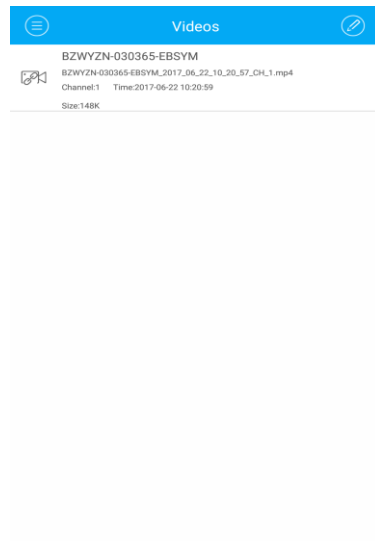

System setting:
Check System Information and
Help Information.

